


Longer range. Lower cost.




The world's only drop-in replacement stator core material that can deliver 5% WLTP3 range improvement.

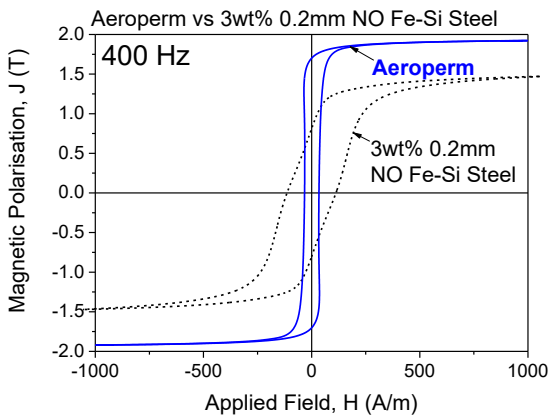


Aeroperm® is a breakthrough magnetic materials technology that directly replaces conventional iron-silicon steel stator cores.


With no change to motor design or production tooling, Aeroperm® enables an instant upgrade of electric motor efficiency and power density.

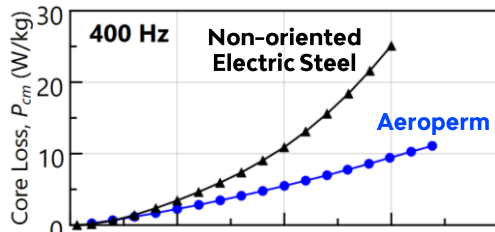


Aeroperm®'s unique nanocrystalline microstructure cuts stator core losses by up to 97%, increasing WLTP3 drive cycle efficiency by up to 5% with direct core replacement and >10% with drivetrain optimization, enabling range increases or vehicle cost reduction.

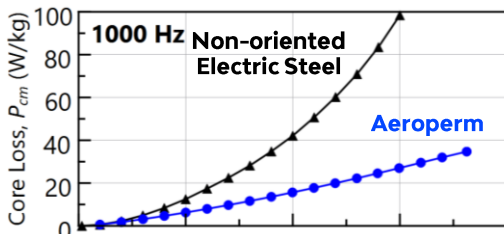

Kite Magnetism supplies the equipment, materials and expertise required to manufacture Aeroperm cores in-house.

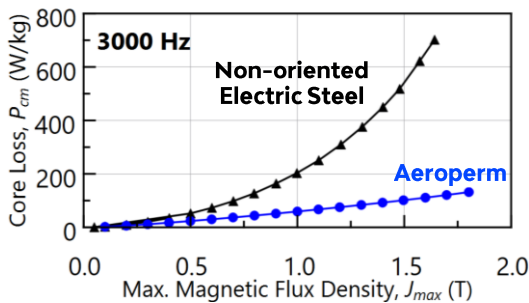

No redesign. No delay. Instant performance upgrade.

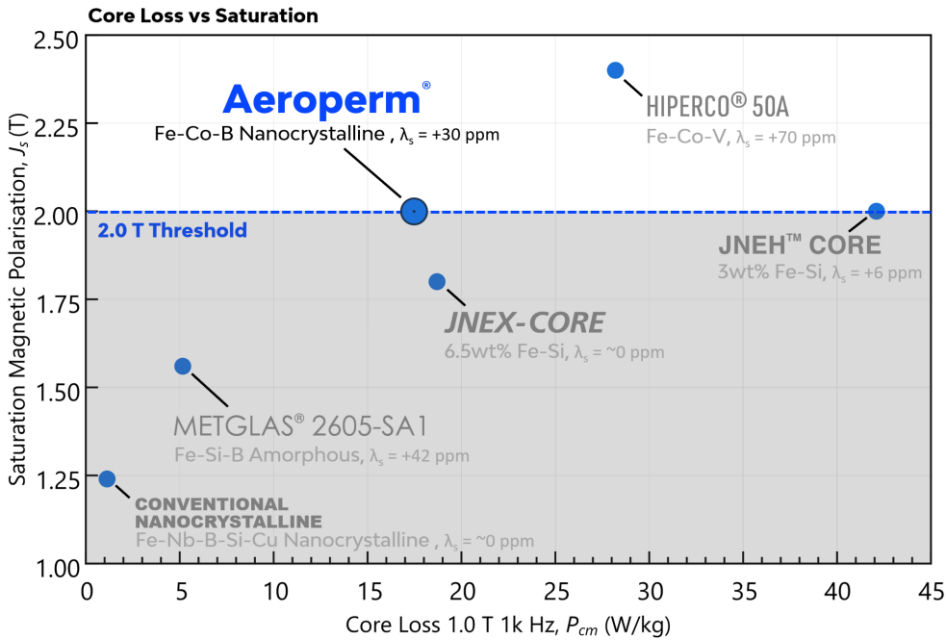

Data sources: Carpenter Technologies Hiperco® 50A manufacturer datasheets (2025). JFE Electric Steel 10JNEX900 and 20JNEH1200 manufacturer datasheets (2017). Metglas 2605SA1 Technical Bulletin (2024). Ansys MOTOR-CAD Materials Library (2025). Parsons et al., JMMM, 476, 142–148 (2019)

	Aeroperm®	NO Electric Steel
Saturation Magnetic Polarization (J_s)	2.00	2.00
Coercivity, 400 Hz 1 T (H_c)	28 A/m	59 A/m
Electrical Resistivity (ρ_{elec})	52 $\mu\Omega$.cm	55 $\mu\Omega$.cm*
Density (ρ)	7.65 g/cm ³	7.65 g/cm ³ *
Saturation magnetostriction (λ_s)	30 ppm	7.8 ppm*
Lamination thickness (t_{lam})	0.024 mm	0.20 mm
Typical stacking factor (L_m)	>92%	>96%
Core loss, 400 Hz, 1.0 T ($P_{cm 400/1}$)	5.5 W/kg	10.9 W/kg [^]
Core loss, 400 Hz, 1.5 T ($P_{cm 400/1.5}$)	9.4 W/kg	25.1 W/kg [^]
Core loss, 1,000 Hz, 1 T ($P_{cm 1k/1.0}$)	17.7 W/kg	42.1 W/kg [^]
Core loss, 1,000 Hz, 1.5 T ($P_{cm 1k/1.5}$)	27.0 W/kg	98.4 W/kg [^]
Core loss, 3,000 Hz, 1.0 T ($P_{cm 3k/1.0}$)	59 W/kg	203 W/kg [^]
Core loss, 3,000 Hz, 1.5 T ($P_{cm 3k/1.5}$)	101 W/kg	528 W/kg [^]

* Fe-Si steel data from JFE Steel Corporation, Electrical Steel Sheets, Cat.No.F1E-001-08.

[^] Fe-Si steel core loss data from Ansys Motor-CAD Materials Database

8-45-57 Normanby Rd
 Notting Hill, Victoria
 Australia
 Ph. +61 (03) 85944946

1968 S. Coast Hwy
 #724 Laguna Beach
 CA 92651 USA
 Ph. +1 (408) 8317162

78 Allee Primavera Centre
 UBIDOCA, 20585 Pringy 74370
 ANNENCY FRANCE
 Ph. +33 (800) 908122



For additional information, please contact: partnership@kitemagnetics.com or visit kitemagnetics.com

The information and data presented herein are typical or average values and are not a guarantee of maximum or minimum values. Applications specifically suggested for material described herein are made solely for illustration to enable the reader to make their evaluation and are not intended as warranties, either express or implied, of fitness for these or other purposes. There is no representation that the recipient of this literature will receive updated editions as they become available. Unless otherwise specified, registered trademarks are property of Kite Magnetics Pty Ltd. Metglas® is a registered trademark of Metglas, Inc. Hiperco® is a registered trademark of Carpenter Technology Corporation. All other trademarks are the property of their respective owners. Competitor data shown are representative values obtained from publicly available manufacturer datasheets under standard laboratory conditions. Kite Magnetics makes no claim as to the exact comparability of test methods.